

Catalog Number Explanation

Kinetix 2000 drive catalog numbers and descriptions are listed in the table below.

Kinetix 2000 Drive Catalog Numbers

Integrated Axis Modules (230V)	Catalog Number
Kinetix 2000, IAM, 230V, 3 kW ⁽¹⁾ Converter, 1 A Inverter	2093-AC05-MP1
Kinetix 2000, IAM, 230V, 3 kW ⁽¹⁾ Converter, 2 A Inverter	2093-AC05-MP2
Kinetix 2000, IAM, 230V, 3 kW ⁽¹⁾ Converter, 3 A Inverter	2093-AC05-MP5
Axis Modules (230V)	
Kinetix 2000, AM, 230V, 1 A Inverter	2093-AMP1
Kinetix 2000, AM, 230V, 2 A Inverter	2093-AMP2
Kinetix 2000, AM, 230V, 3 A Inverter	2093-AMP5
Kinetix 2000, AM, 230V, 6 A Inverter	2093-AM01
Kinetix 2000, AM, 230V, 9 A Inverter	2093-AM02
Power Rails	
Kinetix 2000, Single-Axis Power Rail	2093-PRS1
Kinetix 2000, Two-Axis Power Rail	2093-PRS2
Kinetix 2000, Three-Axis Power Rail	2093-PRS3
Kinetix 2000, Four-Axis Power Rail	2093-PRS4
Kinetix 2000, Five-Axis Power Rail	2093-PRS5
Kinetix 2000, Seven-Axis Power Rail	2093-PRS7
Kinetix 2000, Eight-Axis Power Rail with Shunt or Slot Filler	2093-PRS8S
Shunt Module	
Kinetix 2000, SM, 230V, 50 W	2093-ASP06
Slot Filler	
Kinetix 2000, SF, Power Rail Slot Filler	2093-PRF

⁽¹⁾ Derated to 2 kW for single-phase operation.

Environmental Specifications

Attribute	Operational Range	Storage Range (non-operating)
Ambient Temperature	0...50 °C (32...122 °F)	-40...85 °C (-40...185 °F)
Relative Humidity	5...95% noncondensing	5...95% noncondensing
Altitude	1000 m (3281 ft) 3000 m (9843 ft) with derating ⁽¹⁾	3000 m (9843 ft) during transport
Environmental Rating	IP2X (EN60529) For use only in a Pollution Degree 2 Environment (UL508c, section 2.7) Open Device (UL508c, section 2.5)	
Vibration	5...55 Hz @ 0.35 mm (0.014 in.) double amplitude, continuous displacement; 55...500 Hz @ 2.0 g peak constant acceleration	
Shock	15 g, 11 ms half-sine pulse (3 pulses in each direction of 3 mutually perpendicular directions)	
Conformal Coating	IB31: DSP and SERCOS pins, anti-dust and anti-humidity 1B73LSE: Power Rail connector pins, Converter, Inverter, Shunt, Power Rail, and Slot Filler PCB assemblies, clear UL creepage and clearance issue.	


⁽¹⁾ Peak current output is derated by 15% for each 1000 m over 1000 m (3281 ft).

Weight Specifications

Kinetix 2000 Module	Catalog Number	Description, Approx. kg (lb)
IAM	2093-AC05-MP1	1.32 (2.9)
	2093-AC05-MP2	
	2093-AC05-MP5	
AM	2093-AMP1	0.67 (1.5)
	2093-AMP2	
	2093-AMP5	
	2093-AM01	0.95 (2.1)
	2093-AM02	
SM	2093-ASP06	0.59 (1.3)

Kinetix 2000 Module	Catalog Number	Description, Approx. kg (lb)
Power Rails (Slim)	2093-PRS1	0.27 (0.6)
	2093-PRS2	0.38 (0.8)
	2093-PRS3	0.51 (1.1)
	2093-PRS4	0.64 (1.4)
	2093-PRS5	0.77 (1.7)
	2093-PRS7	1.03 (2.3)
	2093-PRS8S	1.28 (2.8)
	Slot Filler Module	2093-PRF

Power Rail Dimensions
2093-PRS1, 2093-PRS2, 2093-PRS3, 2093-PRS4, 2093-PRS5, 2093-PRS7, 2093-PRS8S

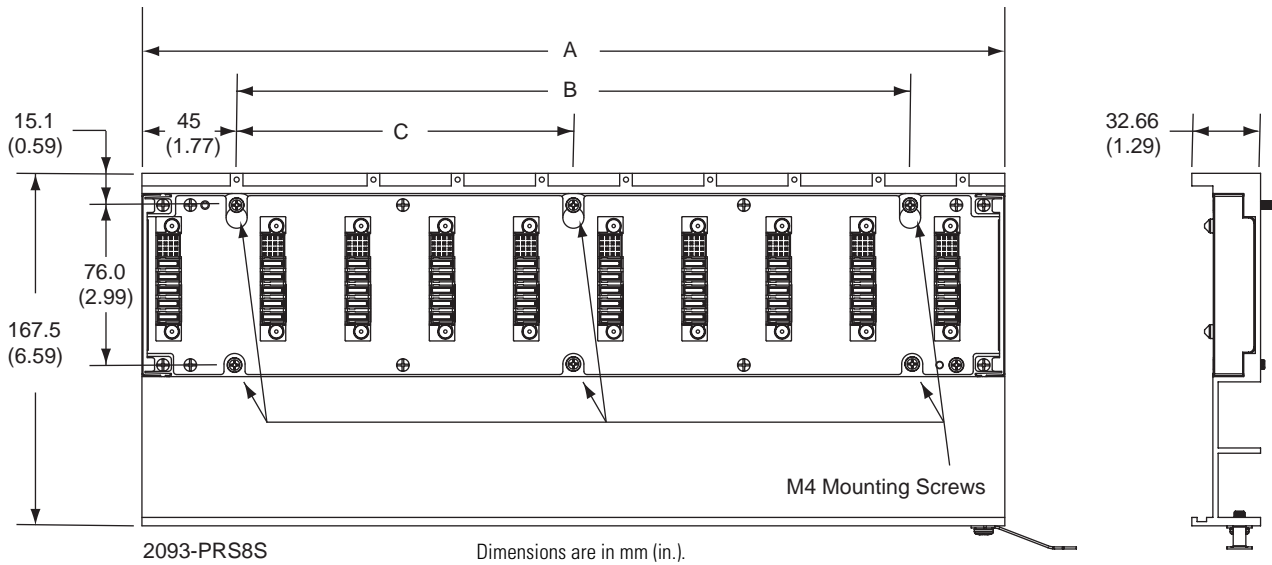

Catalog Number	Description	Dimension A mm (in.)	Dimension B mm (in.)	Dimension C mm (in.)
2093-PRS1	1 axis power rail	90 (3.54)	N/A	N/A
2093-PRS2	2 axis power rail	130 (5.12)	40 (1.57)	N/A
2093-PRS3	3 axis power rail	170 (6.69)	80 (3.15)	N/A
2093-PRS4	4 axis power rail	210 (8.26)	120 (4.72)	N/A
2093-PRS5	5 axis power rail	250 (9.84)	160 (6.30)	N/A
2093-PRS7	7 axis power rail	330 (12.99)	240 (9.45)	120 (4.72)
2093-PRS8S	8 axis power rail	410 (16.14)	320 (12.60)	160 (6.30)