

General Specifications

I/O Modules with Built-in Barrier (for FIO)



GS 33J60F80-01EN

[Release 6]

■ GENERAL

This document describes about I/O Modules with Built-in Barrier (for FIO) which can be installed in Zone 2 or Division 2 and connected to devices located in Zone 0, 1, or Division 1.

These modules have galvanic isolation between the field interface and systems but they do not have isolation between channels.

These modules comply with ISA S71.04 class G3, and they can be located in the ambient temperature of -20 to 70 °C.

When connecting these modules to the intrinsically safe circuit, refer to documents "Explosion Protection" (TI 33Q01J30-01E) and "Explosion Protection of FIO Products" (IM 33K01J30-50E) for ATEX approval along with this General Specifications (GS).

Follow the EC-type Examination Certificate or FM certification for details of the rules and regulations of installing these modules in the intrinsically safe environment. It is especially important to follow the "Special Conditions" stated in these certificates.

In case these I/O modules with built-in barriers are to comply with FM approval (FM3610), install them on the following field control units (FCU) or ESB bus node units equipped with power supply modules of PW481-11, PW482-11, or PW484-11.

Field Control Units: AFV30D-S41□11, AFV30S-S31□11, AFV30S-S41□11

*ESB Bus Node Units: ANB10D-4□1, ANB10S-3□1, ANB10S-4□1
ANB10D-4□3, ANB10S-3□3, ANB10S-4□3*

*Optical ESB Bus Node Unit: ANB11D-2□3, ANB11D-4□3
ANB11S-1□3, ANB11S-2□3, ANB11S-3□3, ANB11S-4□3*

■ STANDARD SPECIFICATIONS

● Current Input Modules (Isolated)

Items		Specifications
Model		ASI133
Number of input channels		8, isolated
Input signal		4 to 20 mA
Allowable input current		22.5 mA
Withstanding voltage		1500 V AC
Input resistance	Power ON	For 2-wire: 400 Ω (I=20 mA) to 750 Ω (I=4 mA) For 4-wire: 485 Ω (I=20 mA) to 925 Ω (I=4 mA)
	Power OFF	1 M Ω or larger
Accuracy		± 16 μ A
Step response time		100 ms
Data update period		10 ms
Transmitter power supply		16 V DC or higher (output current limit: 20 mA)
Maximum normal mode input voltage applied to the terminals by 4-wire transmitter		25 V
Drift due to ambient temperature change		± 16 μ A/10 $^{\circ}$ C
Maximum current consumption		150 mA (5 V DC), 450 mA (24 V DC)
Weight		Approx. 0.30 kg
External connection		Pressure clamp terminal (ATSA3□)
HART communication		Available
Barrier type		Isolated interface

Note: When short circuits occur in two or more channels in the field, all channels of the module fails for intrinsic safety.

● Current Output Modules (Isolated)

Items		Specifications
Model		ASI533
Number of output channels		8, isolated
Output signal		4 to 20 mA
Maximum output current		23 mA
Withstanding voltage		1500 V AC
Allowable load resistance		0 to 750 Ω at 20 mA, 0 to 600 Ω at 23 mA
Accuracy		± 48 μ A
Step response time		100 ms
Data update period		10 ms
Drift due to ambient temperature change		± 16 μ A/10 $^{\circ}$ C
Maximum current consumption		150 mA (5 V DC), 350 mA (24 V DC)
Weight		Approx. 0.30 kg
External connection		Pressure clamp terminal (ATSS3□)
HART communication		Available
Barrier type		Isolated interface

Note: When short circuits occur in two or more channels in the field, all channels of the module fails for intrinsic safety.

● TC, mV Input/RTD/POT Input Modules (Isolated)

Items		Specifications	
Model	AST143 (*1) (*2)	ASR133 (*1)	
Number of input channels	16, isolated	8, isolated	
Input signal	TC: IEC 60584-1 (ITS-90) Type B (*3), E, J, K, N, R, S, T mV: -100 to 150 mV, -50 to 75 mV	RTD: 2,3 and 4-wire type IEC 60751 (ITS-90): Pt50, Pt100, Pt200, Pt500, Pt1000 DIN 43760-1987: Ni100, Ni200 Minco: Ni120 POT: 3-wire type 0 to 10 kΩ	
Switching input signal	TC/mV can be set individually for CH1 to CH16.	RTD/POT can be selected individually for CH1 to CH8.	
Allowable input voltage	±5 V	±5 V	
Withstanding voltage	1500 V AC	1500 V AC	
Input resistance	Power ON	1 MΩ or larger	1 MΩ or larger
	Power OFF	1 MΩ or larger	1 MΩ or larger
Accuracy (at 23 °C)	TC: ±40 μV mV: ±80 μV	Pt50, Pt100, Ni100, Ni200, Ni120: ±150 mΩ Pt200: ±300 mΩ Pt500: ±600 mΩ Pt1000: ±1.2 Ω POT: ±2 Ω	
Allowable total resistance of signal source plus wiring	1000 Ω or less	50 Ω per load (*4)	
Effect of allowable signal source resistance (1000 Ω)	±20 μV	-	
Reference junction compensation accuracy	±1 °C (*5) (*6)	-	
Measurement current	-	150 μA	
Temperature drift	TC: ±125 μV/10 °C mV: ±250 μV/10 °C	Pt50, Pt100, Ni100, Ni200, Ni120: ±325 mΩ/10 °C Pt200: ±650 mΩ/10 °C Pt500: ±1.3 Ω/10 °C Pt1000: ±2.6 Ω/10 °C POT: ±5.2 Ω/10 °C	
Data update period	1 second or less	1 second or less	
Burn-out	All channels can be set together. Setting : Not available/available (UP/DOWN)		
Maximum current consumption	150 mA (5 V DC), 80 mA (24 V DC)	150 mA (5 V DC), 60 mA (24 V DC)	
Weight	Approx. 0.30 kg	Approx. 0.30 kg	
External connection	Pressure clamp terminal (ATST4□)	Pressure clamp terminal (ATSR3□)	
Barrier type	Isolated interface	Isolated interface	

- *1: In order to satisfy the EMC requirements in accordance with the IEC 61000, use the shielded cable. (Shielded multi-core cable with one shield for all channel is sufficient.)
- *2: Use a non-ground type thermocouple (TC) because AST143 is an isolated type module. By connecting a ground type thermocouple (TC) to the module's multi-point channels, it becomes multi-point ground and causes a temperature error.
- *3: Type B does not carry out temperature compensation and temperature under 44 °C is not measurable.
- *4: Each wiring resistance must be equal.
- *5: This figure varies depending on the installation conditions.
When the measured temperature is below 0 °C, multiply the following coefficient (K) with the above value.

$$K = \frac{\text{Thermoelectromotive force per degree at } 0 \text{ } ^\circ\text{C}}{\text{Thermoelectromotive force per degree at measured temperature}} \quad \text{F01E.ai}$$

- *6: The reference junction compensation accuracy varies depending on the ambient temperature of the pressure clamp terminal.

For the node unit only

Ambient Temperature	Reference Junction Compensation Accuracy
-20 to 15 °C	±2 °C
15 to 45 °C	±1 °C
45 to 70 °C	±2 °C

● Digital Input Module

Items		Specifications
Model		ASD143
Number of input channels		16, isolated
Input Signal		NAMUR (IEC 60947-5-6) Compatible
Withstanding voltage		1500 V AC
Functions	Status input	Input response time: 15 ms
	Pushbutton input	Minimum ON detection time: 20 ms Maximum ON/OFF cycle: 25 Hz
Maximum current consumption		150 mA (5 V DC), 110 mA (24 V DC)
Weight		Approx. 0.30 kg
External connection		Pressure clamp terminal (ATSB4□)
Barrier type		Isolated interface

● Digital Output Module

Items		Specifications
Model		ASD533
Number of output channels		8, isolated
Output signal		12 V at I=40 mA, 26 V at I=0 mA
Withstanding voltage		1500 V AC
Functions		Status output
Output response time		10 ms
Maximum current consumption		150 mA (5 V DC), 500 mA (24 V DC)
Weight		Approx. 0.30 kg
External connection		Pressure clamp terminal (ATSD3□)
Barrier type		Isolated interface

Note: When short circuits occur in two or more channels in the field, all channels of the module fails for intrinsic safety.

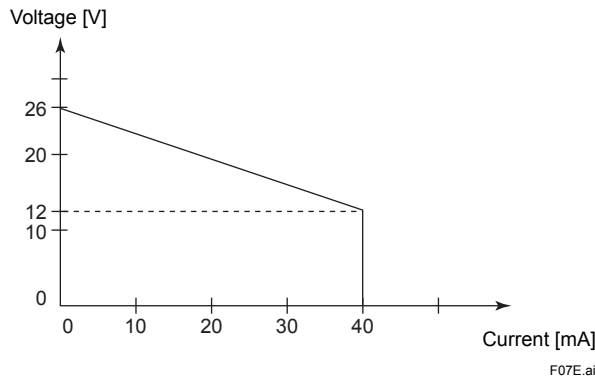


Figure Output Characteristics

Table List of Parameters (ATEX) of Modules with Built-in Barrier

Modules		Uo (V)	Io (mA)	Po (mW)	Ui (V)	Co (nF)			Lo (mH)			Remarks (*1)
						IIC	IIB	IIA	IIC	IIB	IIA	
ASI133-S00 ASI133-H00	Single	27.8	84	584	-	84	659	659	2	18	18	2Wire
		27.8	4	28	28	84	659	659	100	100	100	4Wire
	Redundant	27.8	93	647	-	84	659	659	1.2	14	14	2Wire
		27.8	7	49	28	84	659	659	100	100	100	4Wire
ASI533-S00 ASI533-H00	Single	27.8	86	598	-	84	659	659	1.8	17	17	
	Redundant	27.8	93	647	-	84	659	659	1.2	14	14	
AST143-S00	Single	16.8	7	30	-	220	1730	8000	240	725	1930	No channel or one channel is connected to equipotential bonding.
		16.8	46	194	-	65	380	1550	5.6	22	44	Two channels up to all channels connected to equipotential bonding.
	Redundant	16.8	13	55	-	220	1730	8000	70	280	560	No channel or one channel is connected to equipotential bonding.
		16.8	92	387	-	65	380	1550	1.4	5.6	11	Two channels up to all channels connected to equipotential bonding.
ASR133-S00	Single	13.7	30	103	-	122	867	867	2.5	5	5	
	Redundant	13.7	60	206	-	94	714	714	1	5	5	
ASD143-P00	Single	9.8	21	52	-	1100	7600	11600	26	107	214	
	Redundant	9.8	41	101	-	1100	7600	11600	7	28	56	
ASD533-S00	Single	27.16	108.6	738	-	89	690	690	0.42	9.9	9.9	
	Redundant	27.16	108.6	738	-	89	690	690	0.42	9.9	9.9	

*1: These parameters are valid for the operation nodes of the corresponding modules if the model is not otherwise remarked.

Table List of Parameters (FM) of Modules with Built-in Barrier

Modules		Voc (V)	Isc (mA)	Po (mW)	Vmax (V)	Ca (nF)			La (mH)			Remarks (*1)
						A,B	C,E	D,F,G	A,B	C,E	D,F,G	
ASI133-S00 ASI133-H00	Single	27.8	84	584	-	84	659	659	2	18	18	2Wire
		27.8	4	28	28	84	659	659	100	100	100	4Wire
	Redundant	27.8	93	647	-	84	659	659	1.2	14	14	2Wire
		27.8	7	49	28	84	659	659	100	100	100	4Wire
ASI533-S00 ASI533-H00	Single	27.8	86	598	-	84	659	659	1.8	17	17	
	Redundant	27.8	93	647	-	84	659	659	1.2	14	14	
AST143-S00	Single	16.8	7	30	-	220	1730	8000	240	725	1930	No channel or one channel is connected to equipotential bonding.
		16.8	46	194	-	65	380	1550	5.6	22	44	Two channels up to all channels connected to equipotential bonding.
	Redundant	16.8	13	55	-	220	1730	8000	70	280	560	No channel or one channel is connected to equipotential bonding.
		16.8	92	387	-	65	380	1550	1.4	5.6	11	Two channels up to all channels connected to equipotential bonding.
ASR133-S00	Single	13.7	30	103	-	122	867	867	2.5	5	5	
	Redundant	13.7	60	206	-	94	714	714	1	5	5	
ASD143-P00	Single	9.8	21	52	-	1100	7600	11600	26	107	214	
	Redundant	9.8	41	101	-	1100	7600	11600	7	28	56	
ASD533-S00	Single	27.16	108.6	738	-	89	690	690	0.42	9.9	9.9	
	Redundant	27.16	108.6	738	-	89	690	690	0.42	9.9	9.9	

*1: These parameters are valid for the operation nodes of the corresponding modules if the model is not otherwise remarked.

■ OPERATING ENVIRONMENT

Hardware Requirements

The I/O modules run on the following FCS.

AFV30S, AFV30D

Software Requirements

The I/O modules run on the standard functions of the following FCS.

VP6F1700 Control Function for Field Control Station (for AFV30□, Vnet/IP and FIO): for AFV30□

Engineering Requirements

Works on VP6E5100 Standard Builder Function

■ ANALOG I/O MODULE WITH BUILT-IN BARRIER (WITH HART COMMUNICATION)

The analog I/O module (with HART communication function) connected to a transmitter or a valve positioner receives HART variable (*1) in addition to exchange analog input/output data by 4 – 20 mA signal with field control stations (FCS) .

*1: HART variable can be read by HART Command #3.


There are 2 types of analog I/O modules (with HART communication function).

Table Analog I/O Modules with Built-in Barrier (with HART Communication Function)

Model	Description	Function
ASI133-H	Analog input module with built-in barrier	4 – 20 mA, 8 channel, isolated
ASI533-H	Analog output module with built-in barrier	4 – 20 mA, 8 channel, isolated

● Communication with HART Devices

The analog I/O modules (with HART communication function) communicate with field devices and store analog data and HART variables in the Input/Output image area in the communication module. An FCS refers to and sets the Input/Output image by accessing the analog I/O modules (with HART communication function). The FCS utilizes the field device data via I/O terminals of the function block in the same way as other analog/digital I/O signals.

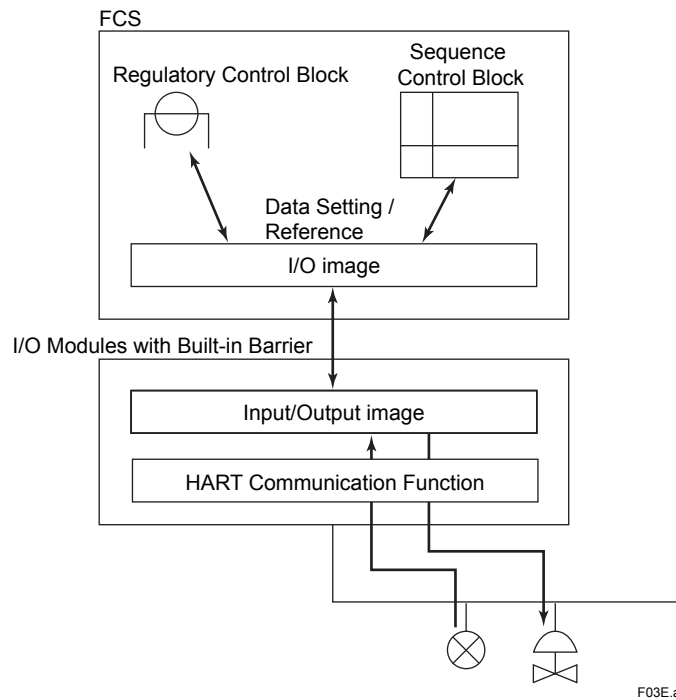

F03E.ai

Figure Process Data Flow of HART Communication

● **HART Communication Functional Specifications**

The analog I/O modules (with HART communication function) are equipped with HART modems and enable HART communication (*1) by directly connecting the HART devices to the modules.

No. of HART devices: Max. 16 devices/module

HART variables: Max. 32 points/module

HART variables can be treated as ordinary process input data via %Z terminal connection. It is just for input.

HART multidrop connection (*2): Max. 5 devices/channel

HART variables data refresh cycle time :

1 second/device (When maximum of 16 devices are connected, it is 17 seconds per ESB bus connection.)

*1: HART communication refers to HART variable communication, on-demand communication, and hand held terminal (HHT) communication.

*2: It is possible to connect only input devices. This connection does not support analog data value nor burst function.

● **HART Communication Specifications**


Table HART Communication Specifications

Function	Description
Communication mode	Serial half-duplex, start-stop synchronization, 1 bit start/8 bit/odd number parity/1 bit stop
Applicable standard	HART Protocol Revision 5.7 (*1)
Transmission speed	1200 bps ± 1%
Modulation technique	Binary phase-continuous FSK 1: 1200 Hz ± 1%, 0: 2200 Hz ± 1%
Frame length	5 to 267 bytes Contents of max. 267 bytes Delimiter: 1 Address: 5 Command: 1 Byte count: 1 Data: 255 (including 2-byte response code) Check byte: 1
Frame detection	3-byte header byte-count carrier (ON/OFF) Preamble: 5 to 20 bytes
Error detection coding	Horizontal/vertical parity
Response time	Max. 28 characters (256.7 ms)
No response timer	Primary – 33 characters (305 ms) Secondary – 41 characters (380 ms)
Bus monitor	8 characters (75 ms)
Response window	20 ms

*1: The HART 5, 6, and 7 devices can be connected but applying the HART protocol 5.7 function.

● **HART Communication System Configuration**

The analog I/O modules (with HART communication function) can be configured dual-redundant by placing the two modules in the adjacent slots (odd number and even number slots) on the same node unit.

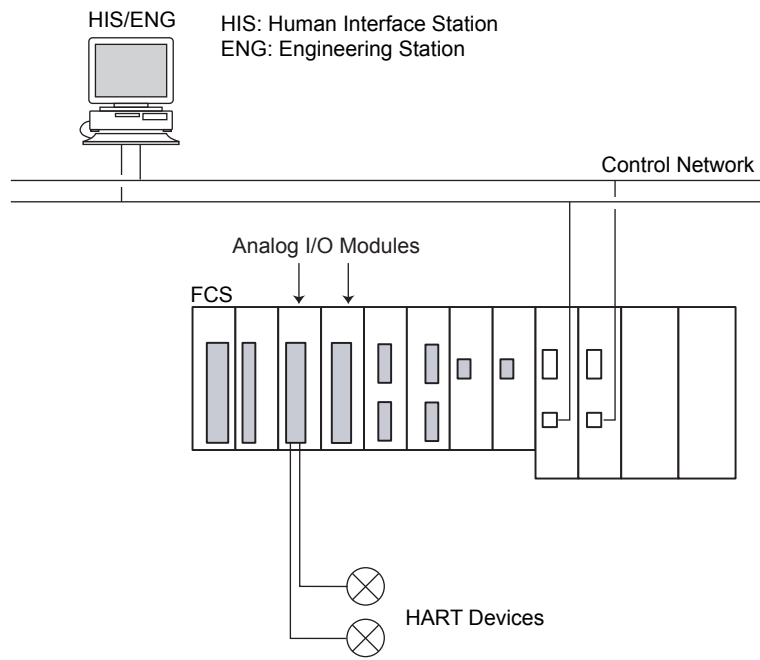


F04E.ai

Figure HART Communication System Configuration (Dual-redundant)

EXTERNAL DIMENSIONS

ASD143 Modules with Barrier (for FIO)

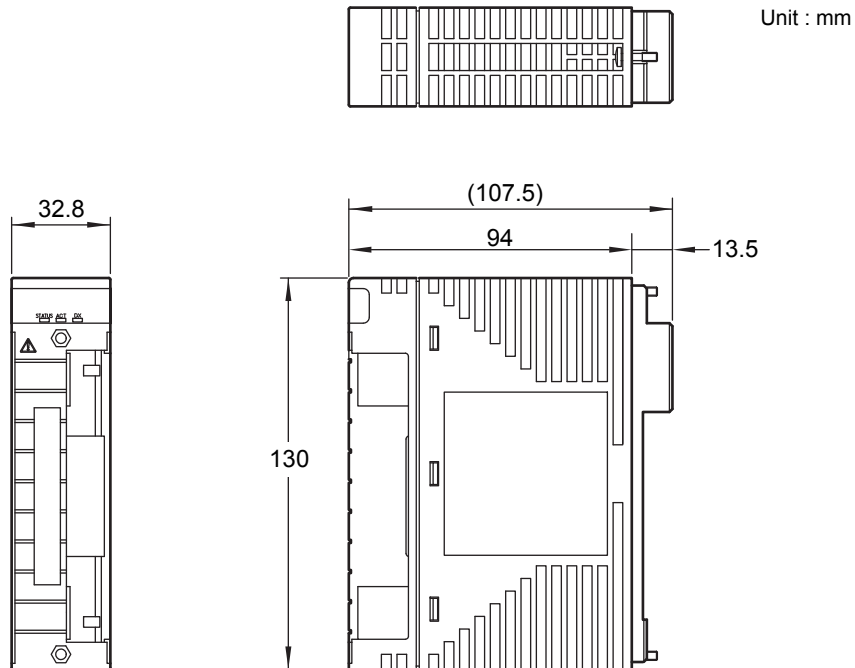


Nominal Tolerances :

When the reference dimension is over 0.5 mm and equal or less than 120 mm, its nominal tolerance is ± 0.8 mm, while its combination of nominal tolerance is ± 1.5 mm.

When the reference dimension is over 120 mm, its nominal tolerance is in accordance with JEM 1459.

ASI133, ASI533, AST143, ASR133, ASD533

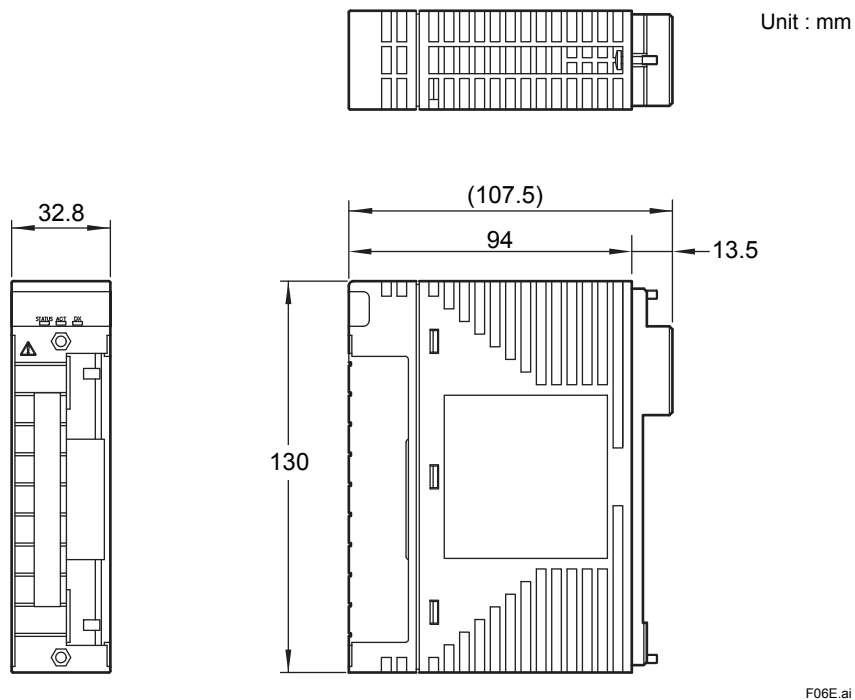

Nominal Tolerances :

When the reference dimension is over 0.5 mm and equal or less than 120 mm, its nominal tolerance is ± 0.8 mm, while its combination of nominal tolerance is ± 1.5 mm.

When the reference dimension is over 120 mm, its nominal tolerance is in accordance with JEM 1459.

■ MODELS AND SUFFIX CODES

● Analog I/O Module with Built-In Barrier

		Description
Model	ASI133	Analog Input Module with Built-In Barrier (4 to 20 mA, 8-channel, Isolated) (with ISA Standard G3 option and temperature (-20 to 70 °C) option)
Suffix Codes	-S	Standard type
	-H	With HART Communication
	0	Always 0
	0	Always 0
Option Codes	/SA3S0	With Pressure Clamp Terminal for Analog Input [Model: ATSA3S-0]
	/SA3D0	With Dual-Redundant Pressure Clamp Terminal for Analog Input [Model: ATSA3D-0]

		Description
Model	ASI533	Analog Output Module with Built-In Barrier (4 to 20 mA, 8-channel, Isolated) (with ISA Standard G3 option and temperature (-20 to 70 °C) option)
Suffix Codes	-S	Standard type
	-H	With HART Communication
	0	Always 0
	0	Always 0
Option Codes	/SS3S0	With Pressure Clamp Terminal for Analog Output [Model: ATSS3S-0]
	/SS3D0	With Dual-Redundant Pressure Clamp Terminal for Analog Output [Model: ATSS3D-0]

		Description
Model	AST143	TC/mV Input Module with Built-In Barrier (16-channel, Isolated) (with ISA Standard G3 option and temperature (-20 to 70 °C) option)
Suffix Codes	-S	Standard type
	0	Always 0
	0	Always 0
Option Codes	/ST4S0	With Pressure Clamp Terminal for TC/mV [Model: ATST4S-0]
	/ST4D0	With Dual-Redundant Pressure Clamp Terminal for TC/mV [Model: ATST4D-0]

		Description
Model	ASR133	RTD/POT Input Module with Built-In Barrier (8-channel, Isolated) (with ISA Standard G3 option and temperature (-20 to 70 °C) option)
Suffix Codes	-S	Standard type
	0	Always 0
	0	Always 0
Option Codes	/SR3S0	With Pressure Clamp Terminal for RTD/POT [Model: ATSR3S-0]
	/SR3D0	With Dual-Redundant Pressure Clamp Terminal for RTD/POT [Model: ATSR3D-0]

● **Digital I/O Module with Built-In Barrier**

		Description
Model	ASD143	Digital Input Module with Built-In Barrier (16-channel, NAMUR Compatible, Isolated) (with ISA Standard G3 option and temperature (-20 to 70 °C) option)
Suffix Codes	-P	With pulse count
	0	Always 0
	0	Always 0
Option Codes	/SB4S0	With Pressure Clamp Terminal Block for Digital Input [Model: ATSB4S-0]
	/SB4D0	With Dual-Redundant Pressure Clamp Terminal Block for Digital Input [Model: ATSB4D-0]

		Description
Model	ASD533	Digital Output Module with Built-In Barrier (8-channel, Isolated) (with ISA Standard G3 option and temperature (-20 to 70 °C) option)
Suffix Codes	-S	Standard type
	0	Always 0
	0	Always 0
Option Codes	/SD3S0	With Pressure Clamp Terminal Block for Digital Output [Model: ATSD3S-0]
	/SD3D0	With Dual-Redundant Pressure Clamp Terminal Block for Digital Output [Model: ATSD3D-0]

■ **APPLICABLE STANDARDS**

Refer to the GS “Integrated Production Control System CENTUM VP System Overview” (GS 33J01A10-01EN).

■ **ORDERING INFORMATION**

Specify models and suffix codes when ordering.

■ **TRADEMARK**

- CENTUM is a registered trademark of Yokogawa Electric Corporation.
- Other company and product names appearing in this document are trademarks or registered trademarks of their respective holders.